







Panel containing six digital meters arranged in two columns and three rows. Each meter is mounted on a metal base with a blue tamper indicator. The meters are labeled with 'Aclara' and 'S173'.

Row	Column 1 (Left)	Column 2 (Right)
1	0.075	0.124
2	0.176	0.3846
3	0.208	0.253

A metal electrical enclosure or meter base on the left side of the panel, featuring a latch and a small label.

Vertical wooden posts or conduits located below the meter panel, used for routing utility lines.

























PANELBOARD	NO.	PKL	DATE
RED FROM PANEL			
CIR.			LOAD DESCRIPTION
1			
2			HEAT
3			
4			
5			
6			AC
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			

PANELBOARD	NO.	PKL	DATE
RED FROM PANEL			
CIR.			LOAD DESCRIPTION
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			

1 2

9 10

11 12

13 14

15 16

20

21 22

30

TYPE NQ08 PANELBOARD
CIRCUIT NO. 11
SERIAL NO. 100724
MAY 1968
SQUARE COMPANY

NQ08B 303AN

ON

OFF


MAIN BREAKER










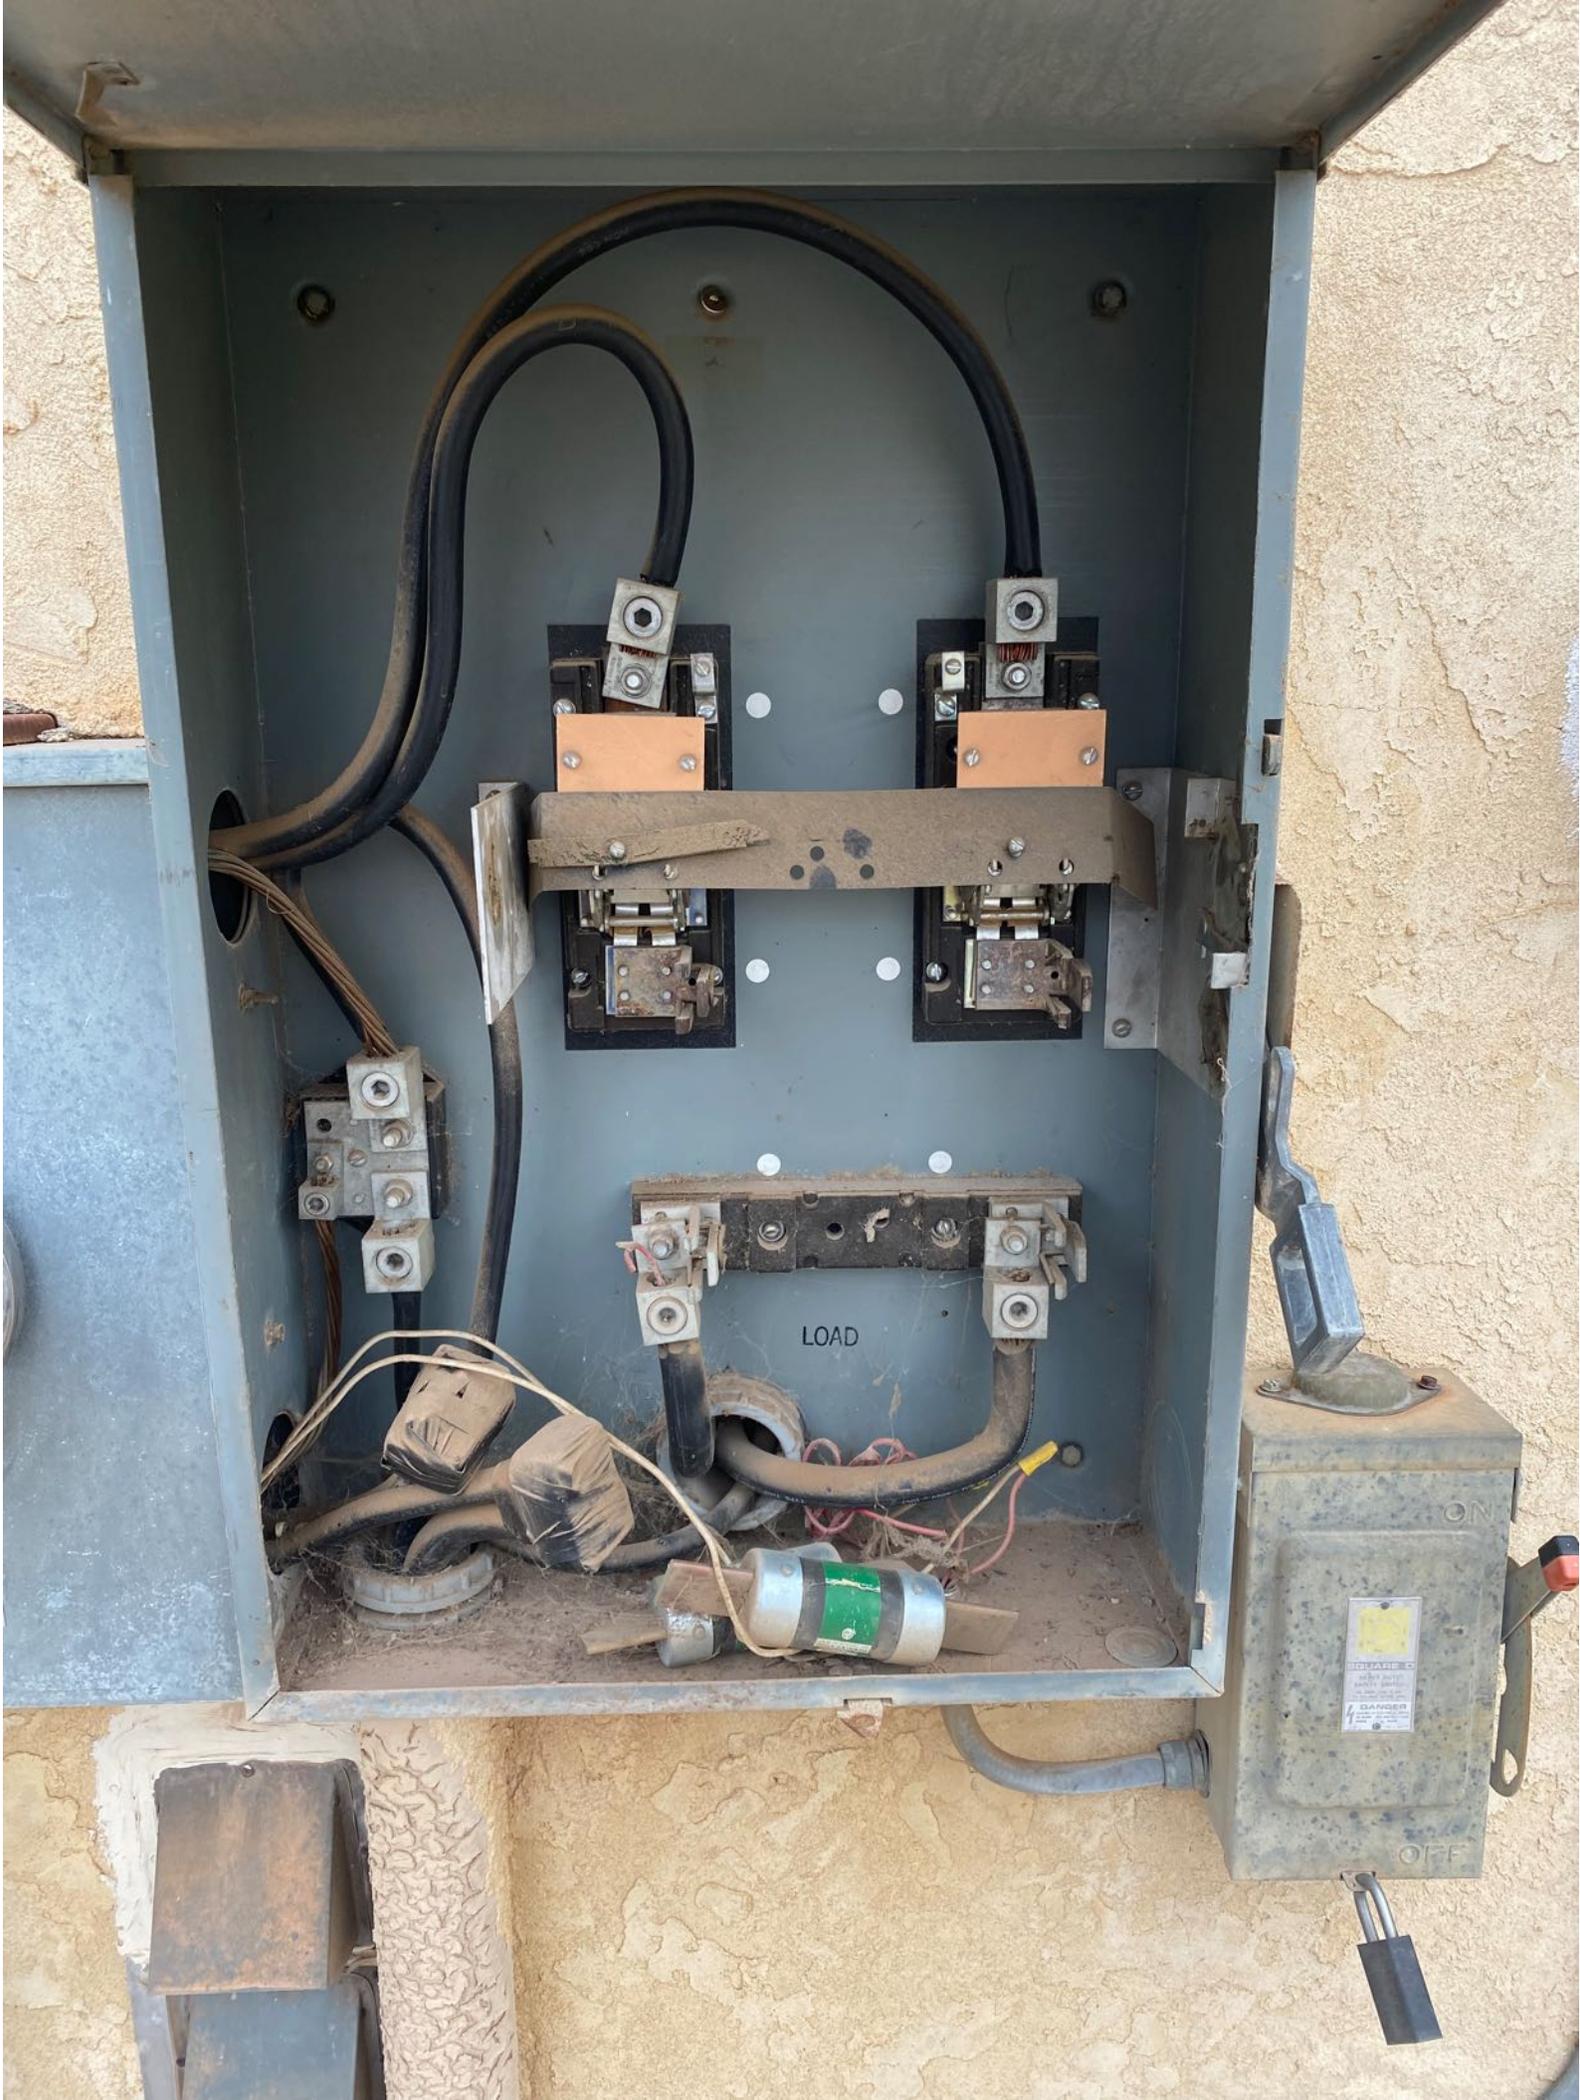







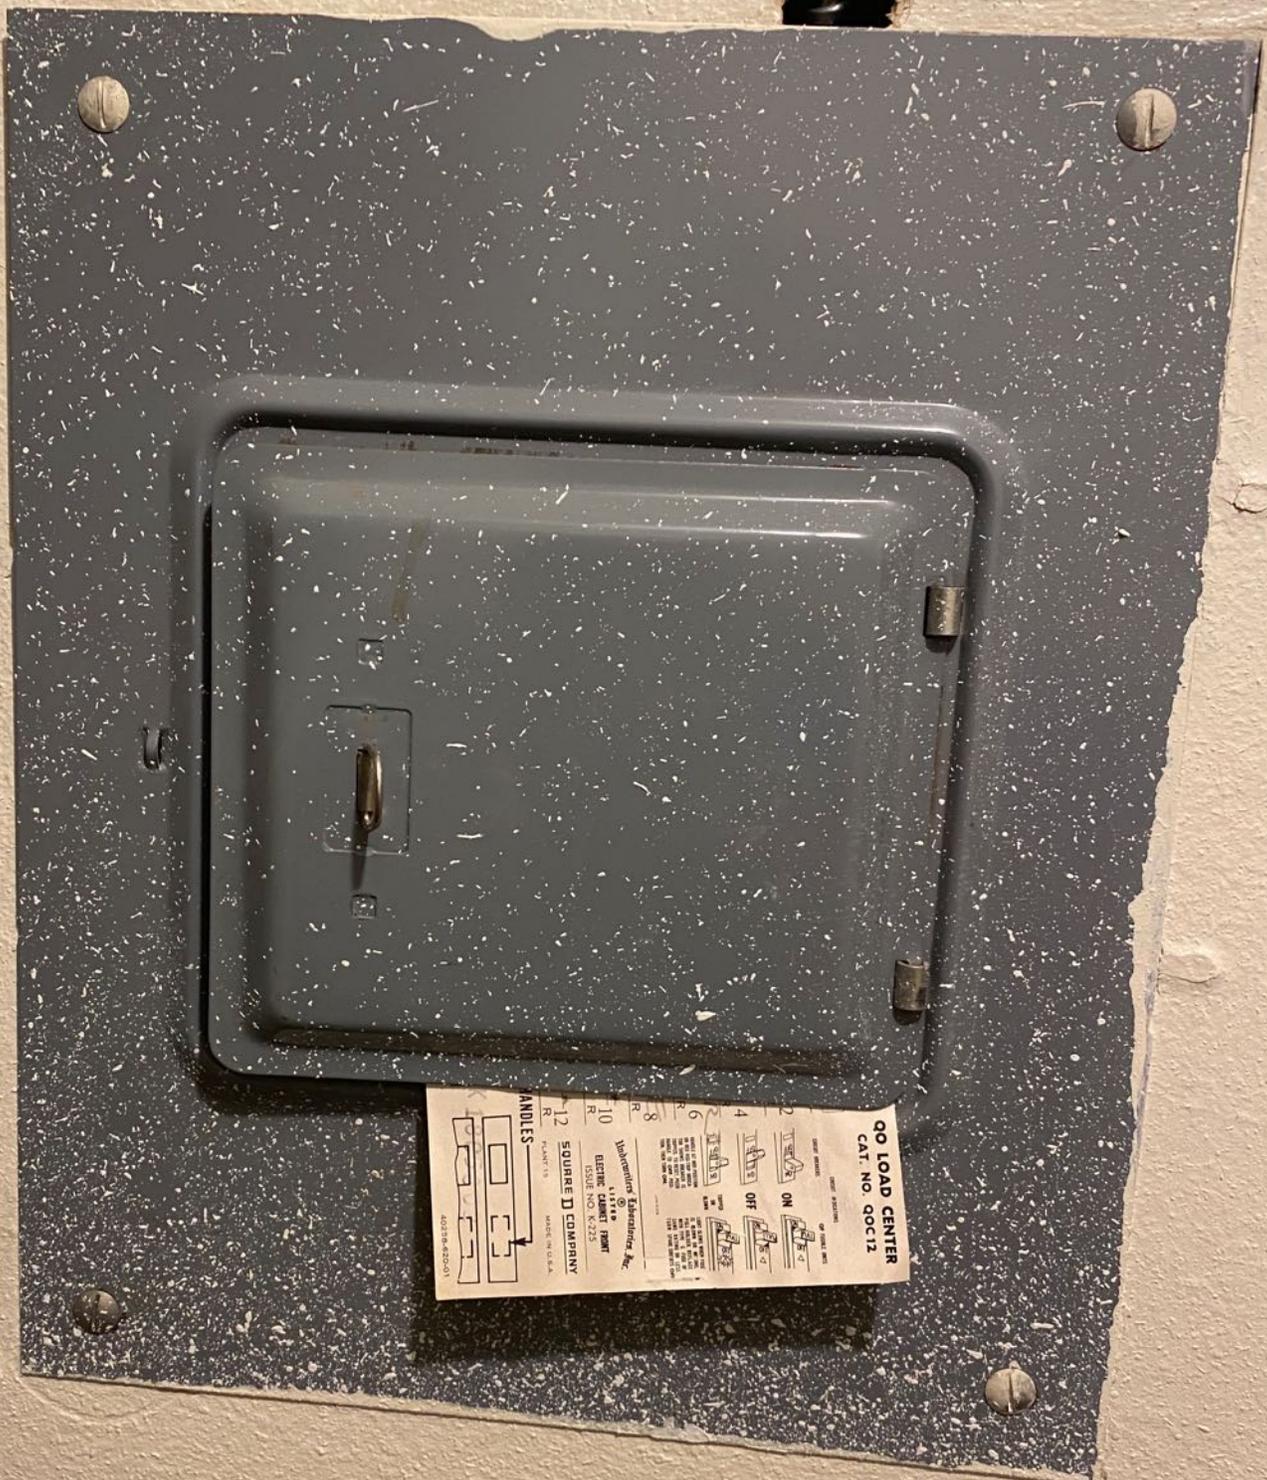

00 LOAD CENTER
CAT. NO. 00C12
 12 SQUARE D COMPANY
 ELECTRIC CABINET FRONT
 ISSUE NO. K-233
 Subcontractor Examination Ag.
 11/91
 MADE IN U.S.A.
 462758-4200-01



- 2
- 4
- 6
- 8
- 10
- 12







































WARNING
ELECTRICITY

208 VOLTS

120/208 3 ϕ

CEC
Panel A

NO.	DESCRIPTION	AMPERES	VOLTS	PHASE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				





PNL PR

WARNING
ELECTRICAL PANEL
KEEP CLEAR
UP TO 36 INCHES

CKT # 1 # 2
CKT # 1 # 3
CKT # 5, 7, 9, 11, 12
CKT # 3











C

WARNING
AVOID ELECTRICAL SHOCK
TURN OFF POWER BEFORE
WORKING ON THIS EQUIPMENT

C

1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28

Technical specifications and safety information sheet.

DANGER

Electrical safety warning label.







WARNING
ELECTRICAL POWER
KEEP CLEAR
TO 30 INCHES

130/209 32



208 VOLTS

3φ

B

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

SAFETY WARNING
DANGER OF ELECTRIC SHOCK
DO NOT OPEN DOOR

SAFETY WARNING
DANGER OF ELECTRIC SHOCK
DO NOT OPEN DOOR

SAFETY WARNING
DANGER OF ELECTRIC SHOCK
DO NOT OPEN DOOR

Handwritten notes on the right door panel.

Large handwritten note on the right door panel.









120/208 3 ϕ

DANGER
WARNING: ELECTRICAL SHOCK
Hazardous voltage may be present.
Do not touch exposed conductive parts.
Always use proper lockout/tagout procedures.
See the manufacturer's instructions for more information.

U
EL

PANEL PVP
M.L.O.
120/208V 100A
3 PHASE 4 WIRE

120/208 VOLTS

CAUTION
POWER STAYS ON
DURING OUTAGE

CRITICAL
LOADS PANEL

STEWART

WARNING
ELECTRICAL PANEL
KEEP CLEAR
TO 36 INCHES

